




Piesta®

COMMERCIAL TILE

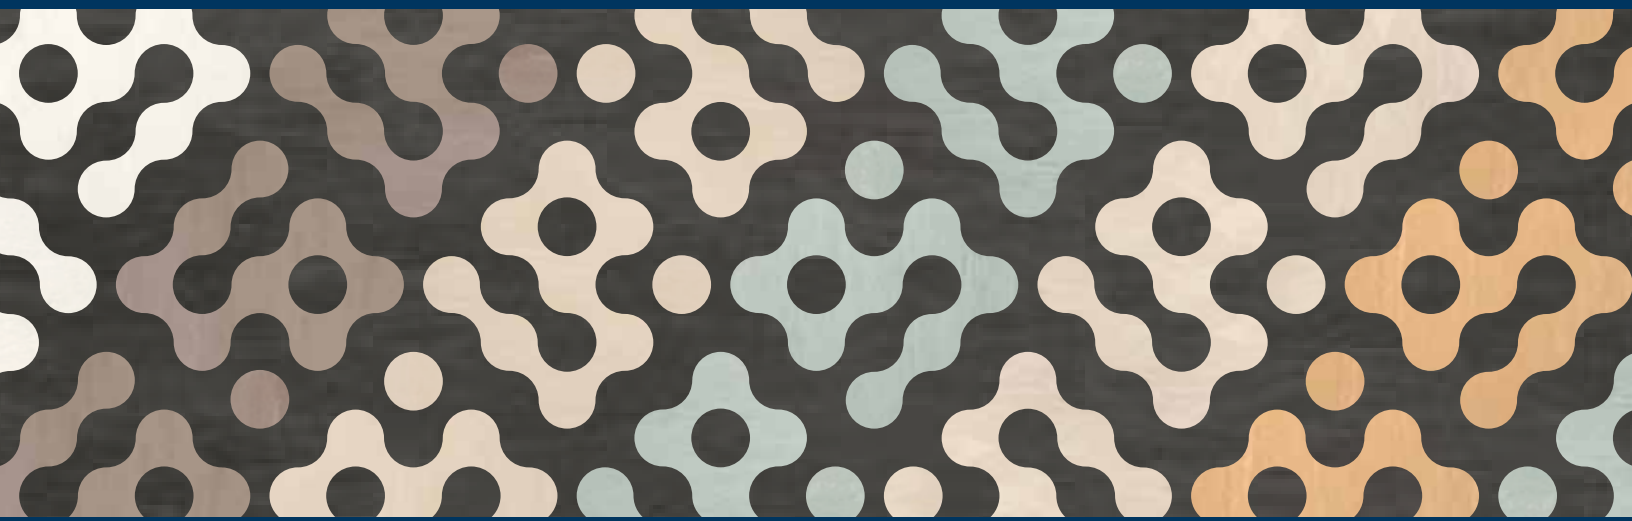

# Piesta

COMMERCIAL TILE

## One Product- Many Solutions.

TOLI International is pleased to introduce Piesta. This high performance versatile tile offers maximum design flexibility for every space. Whether your project is contemporary, traditional, transitional, fun and funky or retro we've made it easier for you to design with confidence.

One product, Piesta, available in three sizes; square, rectangle or plank, and 8 colors produces winning combinations and solutions for all your flooring needs.

Showcase your vision and stand out from the crowd with Piesta.

## Take Design and Performance to a higher level

Piesta is more than just another pretty floor.


It has been developed for use in high traffic commercial spaces and we've covered it with the same 10 year TOLI warranty you've come to rely on for over 20 years. Of course, the low VOC's make it California 1350 compliant and FloorScore certified, also.

We made it easier to design with confidence. Along with color and size options each and every tile is surrounded by a unique bevel. This is another added feature created to add a depth of pattern to your flooring project.






### Square

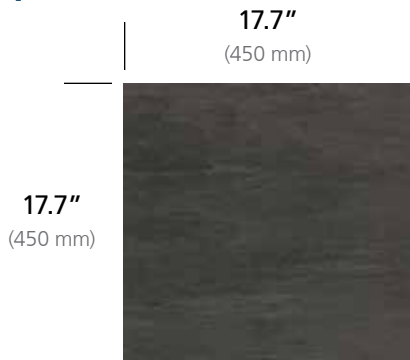

### Rectangle



### Plank

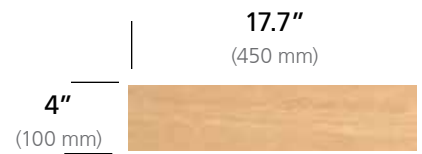



■ 951-18 (square) **Bone**  
 ■ 951-12 (rectangle)  
 ■ 951-4 (plank)

### A Lesson in Versatility.

CBC flooring is committed to bringing you unique flooring products of exceptional quality, design and performance. Piesta goes beyond the ordinary to support your creative ability to think out-of-the-box. The eight neutral colors are available in all three sizes.



■ 955-18 (square) **Ghost**  
 ■ 955-12 (rectangle)  
 ■ 955-4 (plank)



■ 952-18 (square) **Butte**  
 ■ 952-12 (rectangle)  
 ■ 952-4 (plank)



■ 954-18 (square) **Willow**  
 ■ 954-12 (rectangle)  
 ■ 954-4 (plank)



■ 956-18 (square) **Vapor**  
 ■ 956-12 (rectangle)  
 ■ 956-4 (plank)



■ 953-18 (square) **Buckskin**  
 ■ 953-12 (rectangle)  
 ■ 953-4 (plank)



■ 958-18 (square) **Lead**  
 ■ 958-12 (rectangle)  
 ■ 958-4 (plank)







■ 957-18 (square) **Ranch**  
 ■ 957-12 (rectangle)  
 ■ 957-4 (plank)








# Pattern Index

## 1 Size

Square










Rectangle










## 2 Sizes

Rectangle










Plank



Square



Rectangle



Square



Plank



## 3 Sizes







Square



Rectangle



Plank



## Recommended Product Applications

The following TOLI application chart is provided to aid in understanding where TOLI Flooring products are recommended for use. This application chart is a subjective recommendation and is predicated upon the adherence to proper installation techniques; specific location of installation; level of foot traffic; and the type and professional level of maintenance practiced on-site.

	Piesta	Linotesta / FasoPlus / Viale	Mature	Lightwood	Stair Treads/Risers
<b>Healthcare</b>					
Cafeterias	★	★	★	★	
Corridors	★	★	★	★	
Dialysis	●	●	★	●	
Elevators	★	★		●	
Emergency Department	●	●	★	●	
Exam/Prep Room	●	●	★	●	
Hydrotherapy Room	●	●	●	●	★
Intensive Care	●	●	★	●	
Laboratories	●	●	●	●	
Lobbies	★	★	●	★	
Neonatal Intensive Care	●	●	★	●	
Nurses Station	★	★	★	★	
Offices	★	★	●	★	
Operating Room					
Patient Room	★	★	★	★	
Pharmacy	★	★	★	★	
Physical Therapy Room	●	●	●	●	●
Ramps (indoor/outdoor)					★
Stairways/Landings (indoor/outdoor)					★
Staff Lounge	★	★	★	★	
Storage/Utility Room	★	★	●	●	
Waiting Room	★	★	★	★	
<b>Retail</b>					
Drug Store	★	★	●	★	
Indoor Mall Common Areas	★	★		●	
Sales Floor – Dept Store	★	★	●	★	
Sales Floor – Mass Merchandiser	●	●		●	
Specialty Shops	★	★		★	
<b>Education</b>					
Auditorium	★	★		●	
Cafeterias	★	★	★	★	
Classrooms	★	★	●	★	
Computer Rooms	●	●		●	
Corridors	★	★	●	★	
Dormitories	★	★	●	★	
Entryways	★	★		★	
Food Service Area	●	●		●	
Gymnasium					
Laboratories	●	●	●	●	
Lavatories	●	●	●		
Libraries	★	★	●	★	●
Locker Rooms					★
Multipurpose	●	●		●	
Offices	★	★	●	★	
Ramps (indoor)					★
Ramps (outdoor)					★
Showers					
Stairways/Landings					★
Teachers Lounge	★	★	●	★	
Utility/Storage Area	★	★	●	●	
<b>Institutional</b>					
Churches	★	★	●	★	●
Courthouses	★	★	●	★	●
Funeral Houses	●	●	●	★	●
Libraries	★	★	●	★	●
Museums	★	★	●	★	●
Prisons	●	●	●	●	●
<b>Hospitality</b>					
Conference Rooms	●	●	●	★	
Corridors	★	★	●	★	
Dance Floor				●	
Dining Areas	★	★	★	★	
Elevators	●	●		●	
Exercise Rooms					
Guest Bathrooms	●	●	●	●	
Guest Rooms	●	●	●	★	
Lobbies	★	★	●	★	
Lounges	★	★	●	★	
Stairways/Landings					★
Vending Areas	●	●		●	
<b>Office</b>					
Computer Rooms	●	●			
Conference Rooms	★	★	●	★	
Corridors	★	★	●	★	
Dining Areas	★	★	●	★	
Elevators	●	●		●	
Lavatories	●	●	●	●	
Lobbies	★	★	●	★	
Offices	★	★	●	★	
Stairways/Landings					★
Storage Rooms	★	★	●	●	

★ Highly Recommended  
● Recommended

## USGBC-LEED® Credits

(✓) Based on the 2009 LEED rating system and the overall scope of your project, product may contribute to your LEED scorecard.

Product	Materials & Resources					Indoor Environmental Quality			
	MR Credit 1.2: Building Reuse	MR Credit 2: Construction Waste Management	MR Credit 3.1: Materials Reuse	Recycled Content Pre-Consumer	Recycled Content Post-Consumer	MR Credit 4: Recycled Content Contribution (Sum of post-consumer + 1/2 pre-consumer)	IEQ Credit 4.1: Low Emitting Materials - Adhesives	IEQ Credit 4.3: Low Emitting Materials - Flooring Systems	*California Section 01350 Compliant
Piesta	✓	✓	✓	36%	0%	18%	✓	✓	✓

\*Piesta is FloorScore Certified SCS-FS-03026

## Resistance to Staining & Chemicals per ASTM F 925

Chemicals	1 Hour	24 Hours
Acetic Acid – 28%	0	0
Hydrochloric Acid – 38%	0	0
Ammonium Hydroxide – 10%	0	0
Ammonium Hydroxide – 30%	0	0
Potassium Hydroxide – 15%	0	0
Sodium Hydroxide – 15%	0	0
Sodium Hydroxide – 50%	0	0
Sulfuric Acid – 40%	1	1
Sulfuric Acid – 10%	2	3

Hospital Stains & Chemicals	1 Hour	24 Hours
Aniline Blue – 2.5	3	3
Basic Fuchsin	0	1
Carbol Fuchsin	3	3
Dialysis Solution	0	0
Eosin – 1%	2	2
Giesma Blood Stain	1	1
Hema 3 Solution	0	0
Hematoxylin – 5%	0	1
Hydrogen Peroxide – 30%	0	0
Iodine Tincture	1	1
Methylene Blue	1	1
Potassium Permanganate – .5%	0	1
Provine-Iodine	1	2
Rhondamine B. Base	0	2
Urea Solution	0	0
Wright's Blood Stain	1	2

Solvents	1 Hour	24 Hours
Ethyl (Denatured) Alcohol	0	0
Formaldehyde – 37%	0	0
Isopropyl Alcohol	0	0
Mineral Spirits	0	0
Turpentine	0	0

Miscellaneous Stains & Chemicals	1 Hour	24 Hours
Betadine Skin Cleanser	0	0
Hand Sanitizer (Alcohol Based)	0	0
Phenolic Disinfectant Cleaner	0	0
Quaternary Disinfectant Cleaner	0	0
Bleach	0	0

**Changes** 0: None 1: Slight 2: Moderate 3: Severe

Piesta pass ASTM Test Method F 925, Resistance to Chemicals. F 925 calls for exposure to chemicals for one hour. The chart above shows results for the required 1 hour and even more severe testing protocol over a 24 hour period. Piesta is tested without any applied sealers or floor finishes and are cleaned with a cotton cloth after exposure. For the most accurate results, CBC Flooring recommends using the customer's chemicals on actual product samples that have been treated with the maintenance products to be used on the finished floor. Piesta is readily available for testing from CBC Flooring.

## Which tile is right for you?

In addition to the size, color and design options Piesta resilient tiles have the distinctive appearance of ceramic tile without any of the disadvantages.

## Product Characteristics

Standard Spec	ASTM F 1066
Classification	Class II
Nominal Dimensions / Packaging	17.7" x 17.7" (450mm x 450mm) 14 pcs/ctn (30.6 sf/ctn)
	17.7" x 12" (450mm x 300mm) 20 pcs/ctn (29.2 sf/ctn)
	17.7" x 4" (450mm x 100mm) 60 pcs/ctn (29.2 sf/ctn)
Overall Thickness	3.0 mm (0.120")

## Fire

ASTM E 648 Critical Radiant Flux	Class 1 (> 0.45/sq cm)
ASTM E 662 Smoke Generation	< 450 Flaming & Non-Flaming

## Test Performance

ASTM F 1066 Standard Specification for Vinyl Composition Floor Tile	Meets or Exceeds Requirements
ASTM C 1028 Static Coefficient of Friction	> 0.6 ADA Compliant
ASTM F 970 (Modified) Static Load Limit	500 PSI
ASTM F 925 Chemical Resistance	Passes
ASTM F 2199 Dimensional Stability	Passes
ASTM F 1265 Resistance to Impact	Passes
ASTM F 1304 Deflection of Tile	Passes
ASTM F 1515 Resistance to Light	Passes
CA 01350 VOC Emissions	Passes FloorScore Certified SCS-FS-03026

## Warranty

TOLI products are covered by a limited 10-year warranty. Visit our web site, [cbcflooring.com](http://cbcflooring.com) for complete details.



Certified by QMS



Certified by QMS



**Piesta**  
COMMERCIAL TILE

TOLI International, Division of CBC AMERICA LLC  
919-230-8700 • [www.cbcflooring.com](http://www.cbcflooring.com)



CBC Flooring

♻️ Certified paper, contains post-consumer fiber.  
♻️ Acid-free recycled material. Printed with organic-based inks.